

Standalone client

🌐 Language: [Deutsch](#) · [English](#)

🔧 Standalone client

The standalone client starts the Rich Client without Web Start – as a copyable directory with a start script.

HOW-TO

USER

UPDATED: JUL 2026

APPLIES TO NUCLOS 4.2026.X

On this page


- [Configuration in the installer](#)
- [Start & distribution](#)
- [Related pages](#)

Since Nuclos 4.8 you can install a **standalone client** that runs Nuclos without Web Start.

Configuration in the installer

The "client configuration" step has two optional parameters:

- **Server host** – if left empty, localhost is used (client then only usable on the server).
- **Java runtime** – if given, it is bundled; otherwise a system runtime is used. Without a system runtime this is required.

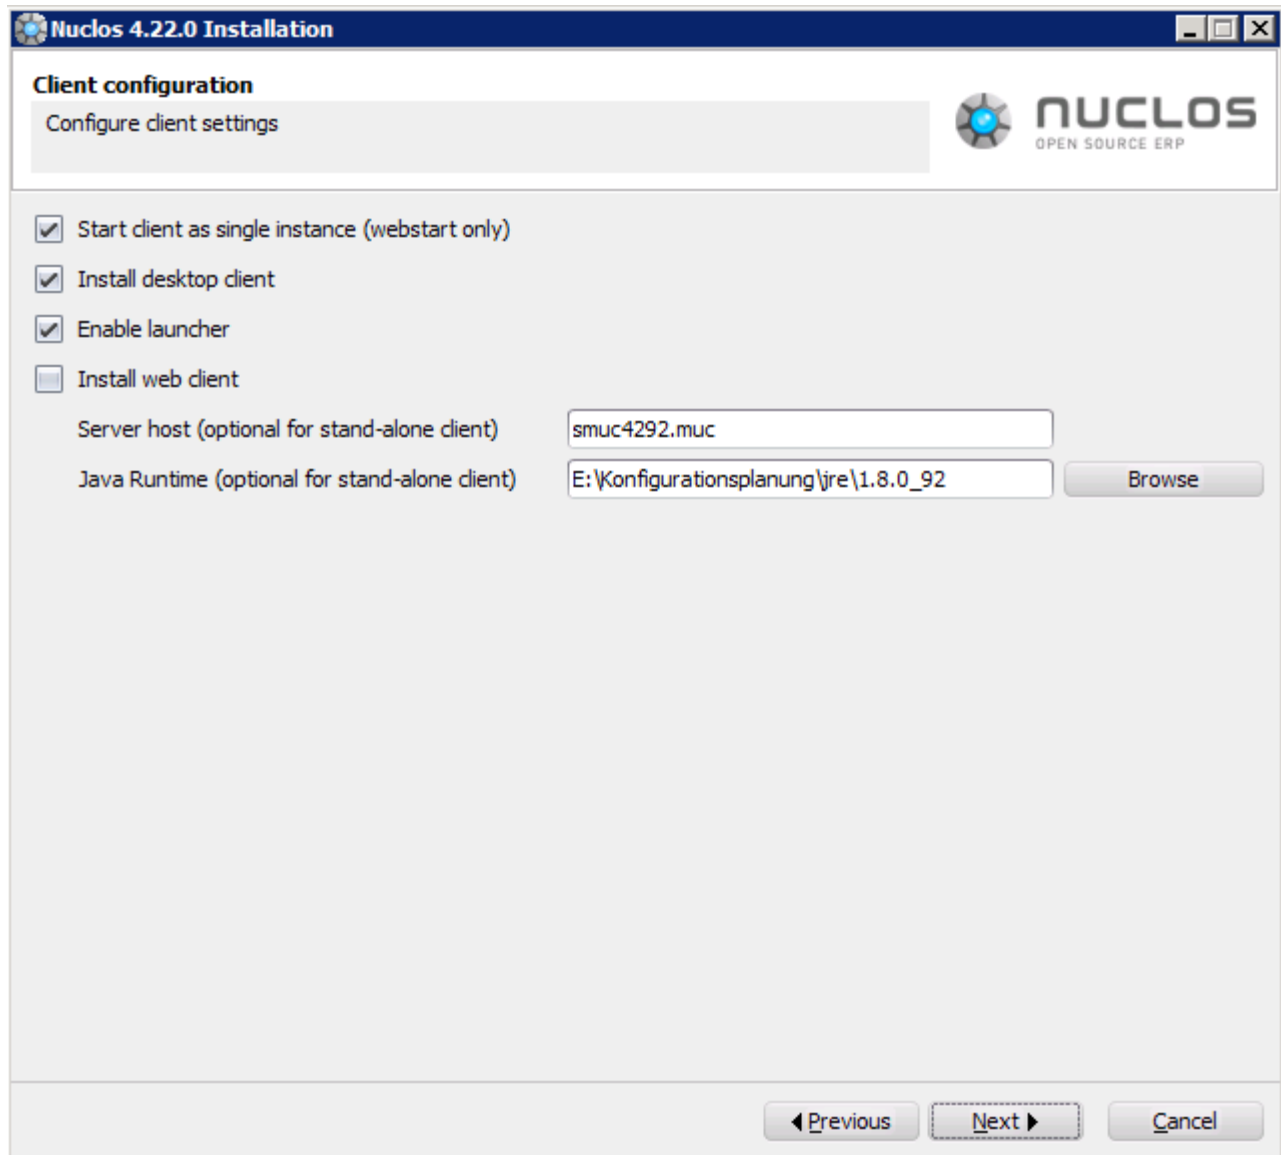

Client configuration in the installer (server host, Java runtime).

Start & distribution

Under `client` in the install directory you'll find everything including start scripts: `nuclos.cmd` (Windows) / `nuclos.sh` (Unix). On first start the all-in-one `nuclos.jar` is unpacked and the client starts. The whole directory can be copied to other machines.

Libraries

SMUC4292

System (C:)

Admin (D:)

Data_E (E:)

_old

DESoftware

Konfigurationsplanung

NetBackup Temp

Nuclos

bin

client

conf

data

extensions

extra

logs

Name ^	Date modified	Type	Size
extensions	24.11.2017 10:39	File folder	
jre	24.11.2017 10:39	File folder	
lib	24.11.2017 10:39	File folder	
all-in-one-85f4b97d87e915dcd12f16346987...	24.11.2017 10:39	gz Archive	25.020 KB
client.properties	24.11.2017 10:39	PROPERTIES File	1 KB
nuclos.cmd	24.11.2017 10:39	Windows Command ...	3 KB
nuclos.sh	24.11.2017 10:39	SH File	1 KB

The client directory with start scripts.



Older versions

Before Nuclos 4.8 the `client` directory was created but the start scripts were missing – you can take these from a 4.8+ version.

Related pages



Launcher (DE)

Start the Rich Client via the Launcher.

[Open](#)



Installation (DE)

Install Nuclos.

[Open](#)