

Styles

 Language: [Deutsch](#) · [English](#)

Styles

Control appearance centrally – style hierarchy, default style and conditional styles.

HOW-TO

APPLICATION DEVELOPER

UPDATED: JUL 2026

APPLIES TO NUCLOS 4.2026.X

On this page


- [What are styles?](#)
- [Style hierarchy](#)
- [Default style](#)
- [Conditional styles](#)
- [Related pages](#)

What are styles?

With **styles** you control the appearance of elements centrally – alignment, font, paragraph settings and more (Properties Style tab).

Style hierarchy

Each style has at most **one parent style** and inherits its attributes unless set itself. Unset attributes always return a default value.

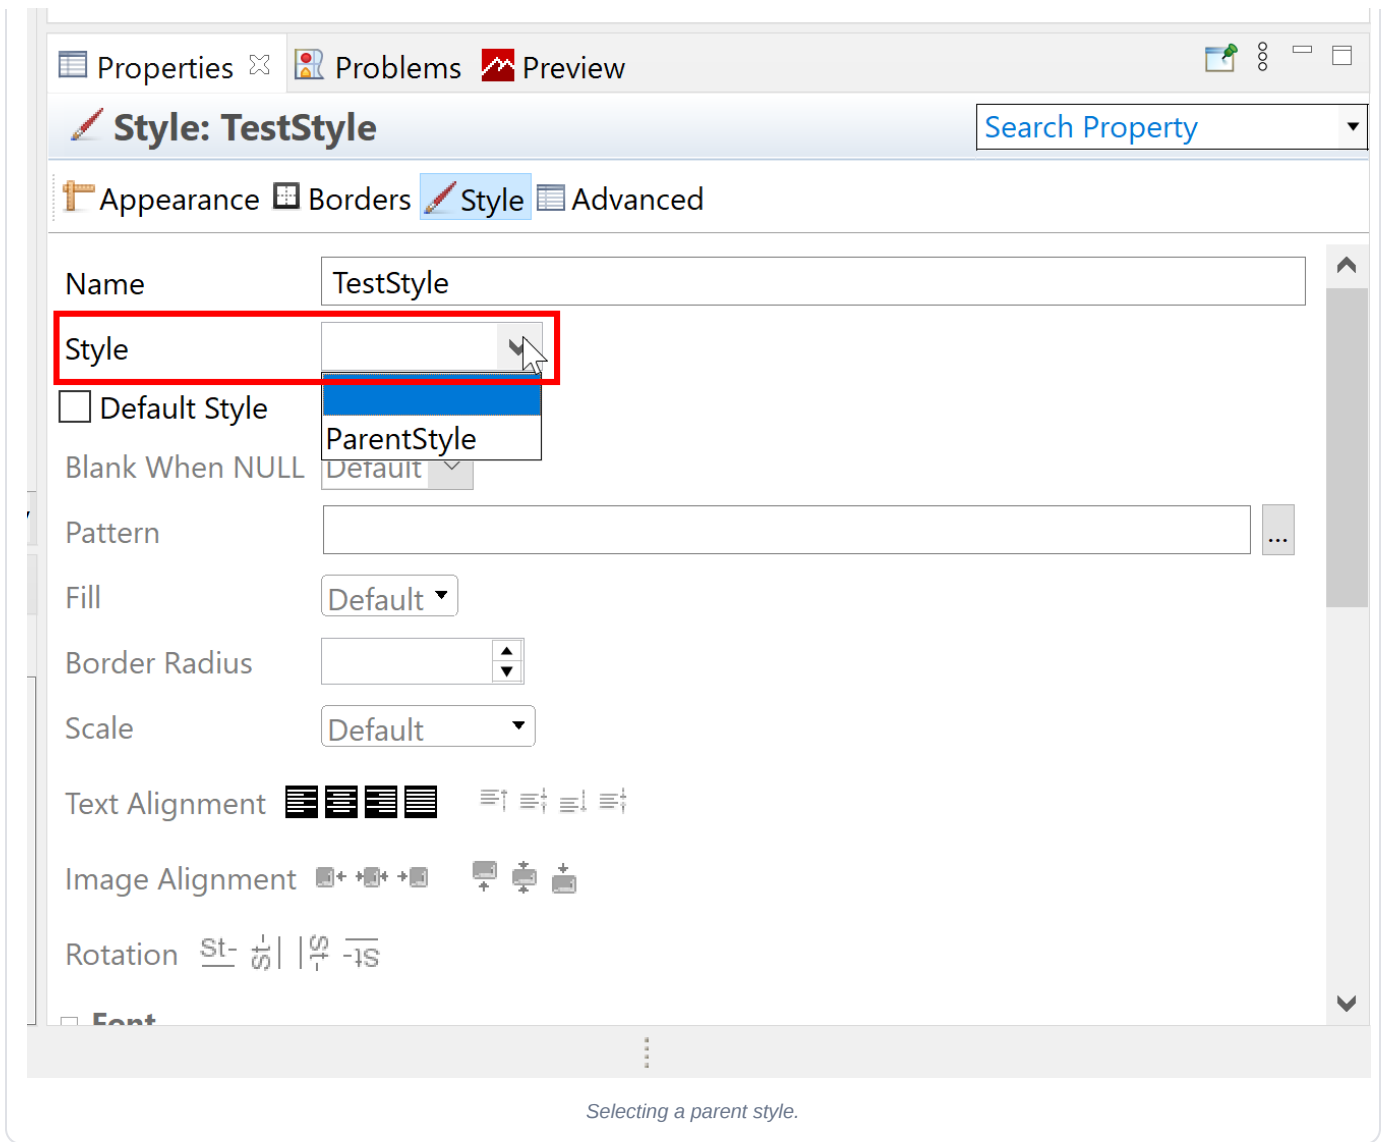

Default style

There can be exactly one **default style** (checkbox *Default Style*). It applies to all elements without their own style.

Conditional styles

Conditional styles are tied to a condition and created as a sub-element of a style (context menu *Create Conditional Style*).

Example: red font when the field NAME has the value „FEHLER“:

1. Set the text colour to red (Appearance Forecolor).
2. In the expression editor set the *conditional expression* (`($F{NAME}).equals("FEHLER")`).

