

Nuclet: Email receiving

🌐 Language: [Deutsch](#) · [English](#)

💡 Nuclet: Email receiving

Data sheet and documentation entry point for the Email receiving Nuclet (reading a mailbox and assigning incoming emails to business objects).

CONCEPT

INTEGRATORS

UPDATED: JUL 2026

APPLIES TO NUCLOS 4.2026.X

On this page

- Releases
- Overview
- Integration
- Related pages

 Machine-translated – under review

This page was machine-translated from German as a first draft and is currently under review. The authoritative source remains the **German original** (see the language switch above).

- Nuclet: Email receiving
 - Releases
 - Overview
 - Integration
 - Related pages
 - Modules
 - Nuclet Wiki

Releases

Version	Date	Notes	Compatibility
1.0	20.06.2018	First published version	from Nuclos 4.27.1

Overview

The "Email receiving" Nuclet offers additional convenience when using the Nuclos Mail API (see <http://api.nuclos.de/org/nuclos/api/provider/MailProvider.html>). It enables reading a specified email mailbox, as well as the assignment of these emails to any BO.

Integration

The integration after a successful Nuclet import (see [Nuclet import](#)) is to be carried out as follows.

Step	Description														
1	Configure the IMAP system parameters required for using the MailProvider. See also Parameter für Mailversand . <table><tr><th>Name</th><th>Beschreibung</th></tr><tr><td>IMAP Port</td><td>IMAP Port für Emailempfang</td></tr><tr><td>IMAP Protocol</td><td>IMAP Protocol used Y/N</td></tr><tr><td>IMAP Username</td><td>IMAP Username für Emailempfang</td></tr><tr><td>IMAP Server</td><td>IMAP Server für Emailempfang</td></tr><tr><td>IMAP Password</td><td>IMAP Passwort für Emailempfang</td></tr><tr><td>IMAP Folder To</td><td>IMAP Folder in den Mails vor dem Löschen kopiert werden</td></tr></table>	Name	Beschreibung	IMAP Port	IMAP Port für Emailempfang	IMAP Protocol	IMAP Protocol used Y/N	IMAP Username	IMAP Username für Emailempfang	IMAP Server	IMAP Server für Emailempfang	IMAP Password	IMAP Passwort für Emailempfang	IMAP Folder To	IMAP Folder in den Mails vor dem Löschen kopiert werden
Name	Beschreibung														
IMAP Port	IMAP Port für Emailempfang														
IMAP Protocol	IMAP Protocol used Y/N														
IMAP Username	IMAP Username für Emailempfang														
IMAP Server	IMAP Server für Emailempfang														
IMAP Password	IMAP Passwort für Emailempfang														
IMAP Folder To	IMAP Folder in den Mails vor dem Löschen kopiert werden														


- 2 Create an integration point for the purpose of assigning emails to a BO of your choice. See also [Integration points](#).



The two name fields must be adopted as is. (Assignment, Assignment field)

- 3 You can now add email receiving to the layout of the BO assigned in the integration point. See also [Layout](#).

A subform for the emails and another for their attachments is recommended.

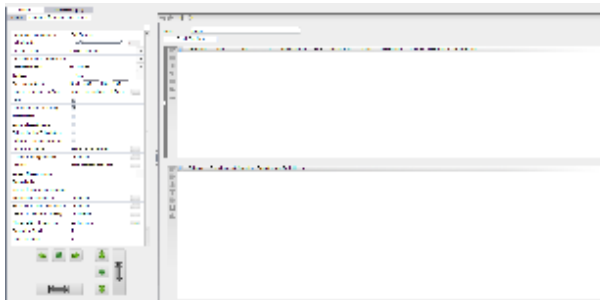

Configuration of the subform:

(E-Mail)

BusinessObject: E-Mail Empfang

Foreign key: zuordnung

(attachment)

BusinessObject: E-Mail Empfang Anhang

Parent subform: E-Mail Empfang

Foreign key: emailempfang

- 4 Furthermore, there is the option to highlight emails that could not be assigned in red.




To do so, set the Nuclet parameter "coloring" to "true".



5

The mailbox is read via a job that runs hourly.

The interval can be changed at will; immediate execution is also possible.

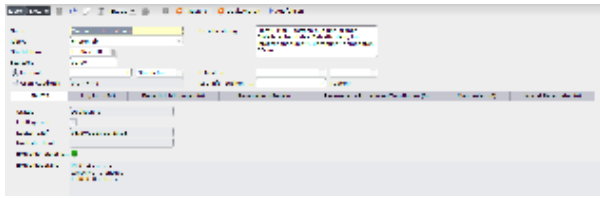

See also [Jobsteuerung](#)

Related pages

Modules

All modules

[Open](#)

Nuclet Wiki

Nuclet Wiki home

[Open](#)