

Attribute groups

🌐 Language: [Deutsch](#) · [English](#)

📖 Attribute groups

Bundle attributes into groups and grant user-group- and status-dependent rights.

REFERENZ

APPLICATION DEVELOPER

UPDATED: JUL 2026

APPLIES TO NUCLOS 4.2026.X

On this page

- [What are attribute groups?](#)
- [Creating](#)
- [Assigning & authorising attributes](#)
- [Related pages](#)


What are attribute groups?

Attribute groups bundle several attributes of a business object into a named group. Their main purpose: **fine-grained permissions** – read and write rights can be granted per user group and status.

Menu: [Configuration](#) [Other](#) [Attribute group](#)

Creating

In the *attribute group* screen you create the groups; the **group** field defines the name.

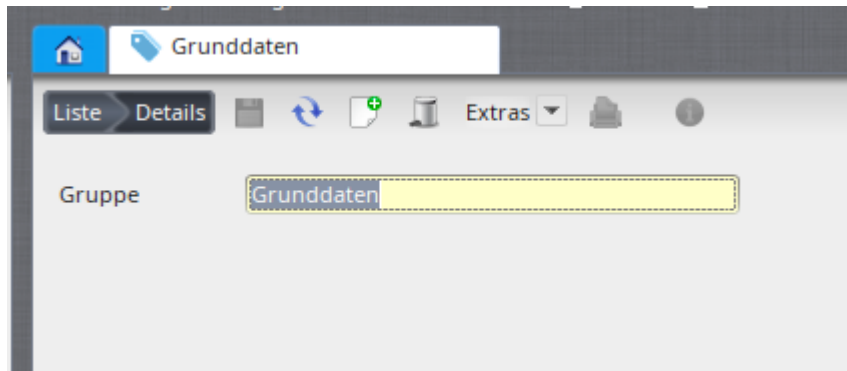

The „attribute group“ screen.

Assigning & authorising attributes

Attributes are assigned to a group in the [BO wizard](#). Using the [status model](#) you then grant user-group- and status-dependent rights: a user group can be given read-only access or no access at all to a group's attributes for certain business objects (depending on the current status).

Related pages

📦 Business object

Attributes.

[Open](#)

📊 Status model

Rights per status.

[Open](#)

