

Report and form

Language: [Deutsch](#) · [English](#)

Report and form

Data sources as the basis of reports and forms – parameters, intid, wildcards and the SQL editor.

REFERENZ

APPLICATION DEVELOPER

UPDATED: JUL 2026

APPLIES TO NUCLOS 4.2026.X

On this page

- [Data source = basis of every report/form](#)
- [Structure of the editor](#)
- [The special intid parameter](#)
- [Text parameters & wildcards](#)
- [Internal parameter types](#)
- [Conditions & SQL](#)
- [Related pages](#)

Data source = basis of every report/form


Data sources are the **basis for reports and forms**. A data source defines which business objects are considered; conditions and joins restrict the data or add attributes. **Parameters** make a saved data source reusable.

Menu: [Configuration](#) [Data sources](#) [Report and form](#)

Structure of the editor

The screen has five areas:

Area	Content
Header	name and description of the data source.
Table selection	system objects (master/transaction data), dynamic objects (BO tables) and saved queries (as sub-queries).
Table view	business objects dragged in via drag&drop.
Parameter definition	name, data type and prompt per parameter. Forms require at least intid.
Column view	visible columns (alias = later field name), sorting and conditions. After saving: <i>SQL</i> and <i>preview</i> .

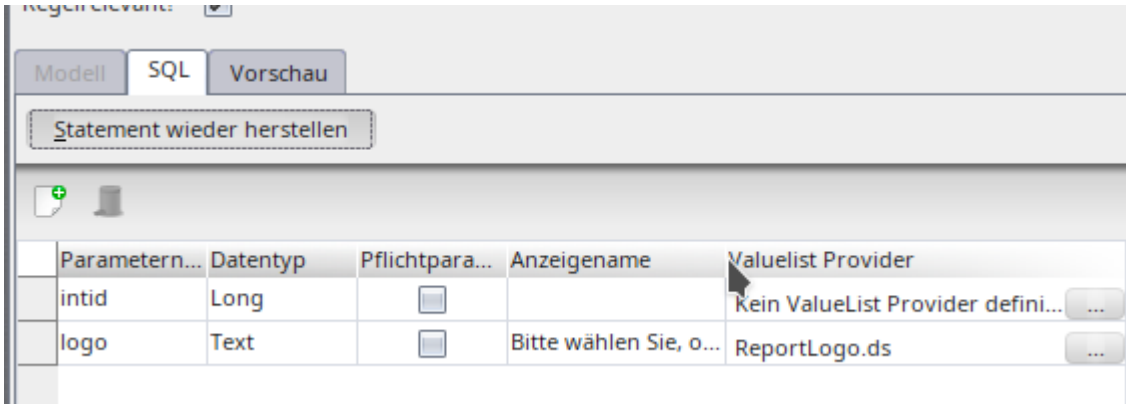

Parameter definition of the data source.

The special intid parameter

Data sources for forms must define the `intid` parameter for the `intid` column of the BO to print. Nuclos fills it automatically when printing – without a dialog. A [value list provider](#) provides a picklist; the text value via `'$name'`, the ID via `'$nameId'`.

T1.j94r_auftrag

intid

auftragauftragsnum

auftragbemerkung

auftragbezdatum

auftragbezeichnung

1.0 auftragbezsumme

auftragdatum

auftragegausland

1.0 auftraggutsumme

auftragkundenname

1.0 auftragmahngebuehr

1.0 auftragnummer

Tabelle	T1.j94r_auftrag	T1.j94r_auftrag	T1.j94r_auftrag
Spalte	intid	auftragauftragsnummer	auftragbemerkung
Alias	intid	auftragauftragsnummer	auftragbemerkung
Sichtbar	☒	☒	☒
Gruppierung			
Sortierung			
Bedingung	=\${intid}		
oder			

intid parameter in the form.

Text parameters & wildcards

Condition	Effect
='\$param'	no wildcards; „=" comparison; allows searching for % and _.
WIE '\$param'	wildcards allowed; LIKE condition.

=\$param%	always LIKE with appended wildcard; empty value = all records.
-----------	--

Internal parameter types

Text list, integer list, SQL are not offered to the user but used internally in rules. SQL parameters require a VLP as a whitelist of allowed expressions.

```
SELECT
    T1.INTID "<primaryKey>",
    T1.INTARTICLENUMBER "articleNumber",
    T1.STRNAME "name"

FROM
    V594__ARTICLE T1

WHERE
    $pSql
    OR
    T1.INTARTICLENUMBER in $pListOfInteger
    OR
    T1.STRNAME in $pListOfText
```

```
List<Number> listOfInteger = new ArrayList<>();
listOfInteger.add(4711L); // Test with Long
List<String> listOfStrings = new ArrayList<>();
listOfStrings.add("4711");

Map<String, Object> params = new HashMap<>();
params.put("pListOfInteger", listOfInteger);
params.put("pListOfText", listOfStrings);
params.put("pSql", "T1.INTARTICLENUMBER > 4000");


DatasourceProvider.run(TestDS.class, params);
```

Conditions & SQL

Column conditions support comparison operators (= > < >= <= != WIE), ranges (between 'a' and 'b'), brackets and column comparisons. Parameters always start with \$. If graphical modelling is not enough, activate the **SQL** tab and edit the SELECT statement directly; then test via *check syntax* and *preview* (incl. export to Excel/PDF/CSV).

The screenshot shows a software interface for editing SQL queries. At the top, there's a menu bar with options like 'Datei', 'Bearbeiten', 'Administration', etc. Below it is a toolbar with icons for saving, undo, redo, and other functions. The main window is divided into several sections. On the left, there's a sidebar with a tree view showing the data source 'DS_Bestellung' and its parameters: 'intid' (Long), 'logo' (Text), and 'sprache' (Text). The main area is titled 'SQL' and contains a complex SQL query. The query starts with a 'SELECT' statement listing various fields like 'T2.STRNAME', 'T2.BESTELLUNGSLIEFERANTNAME', etc. It then follows with a 'FROM' clause involving multiple tables and joins, including 'J94R_BESTELLUNG T2', 'J94R_LIEFERANT T1', and 'J94R_SPRACHE T22'. The 'WHERE' clause includes conditions like 'T2.INTID = \$intid' and 'T3.STRNAME = \$logo'. The query is quite detailed, including a 'CASE' statement for handling different data types and a 'COALESCE' function for null values.

Editing the SQL statement.

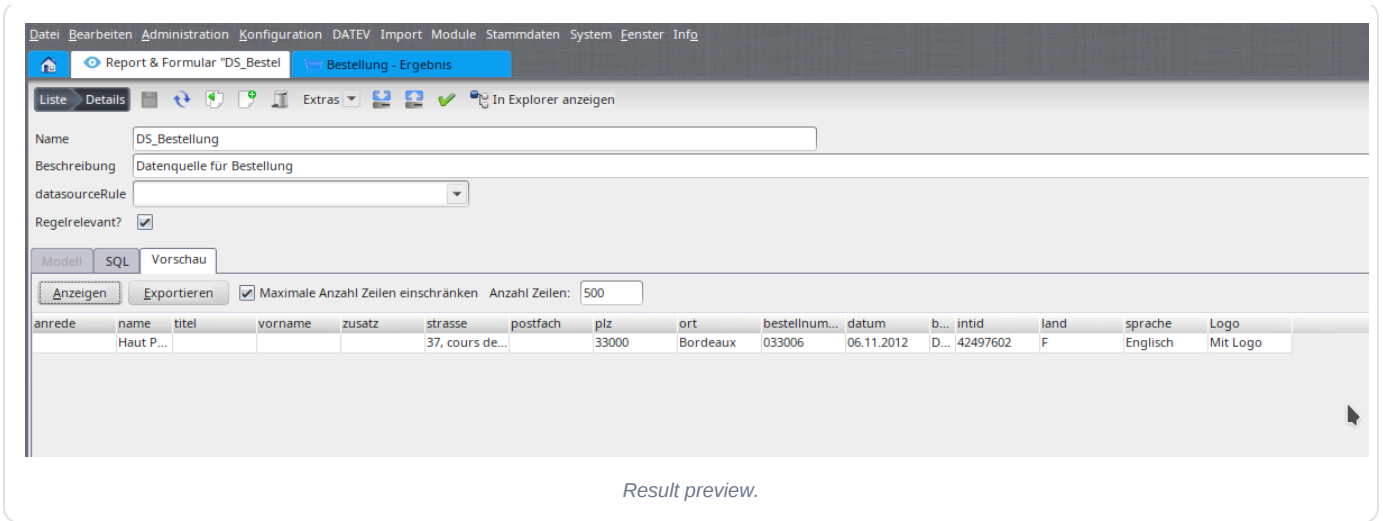

Related pages

Reports

Create reports.

[Open](#)

Forms

Create forms.

[Open](#)

Data sources

Data sources in general.

[Open](#)