

Logging

🌐 Language: [Deutsch](#) · [English](#)

📖 Logging

Where the client log files are and how to open them – for Web and Rich client.

REFERENZ

ADMIN / OPERATIONS

UPDATED: JUL 2026


APPLIES TO NUCLOS 4.2026.X

On this page

- [Web Client](#)
- [Rich Client](#)
- [Related pages](#)

Web Client

The [Nuclos Launcher](#) creates instance-specific client logs. Open them directly via the context menu function **Open client log**.

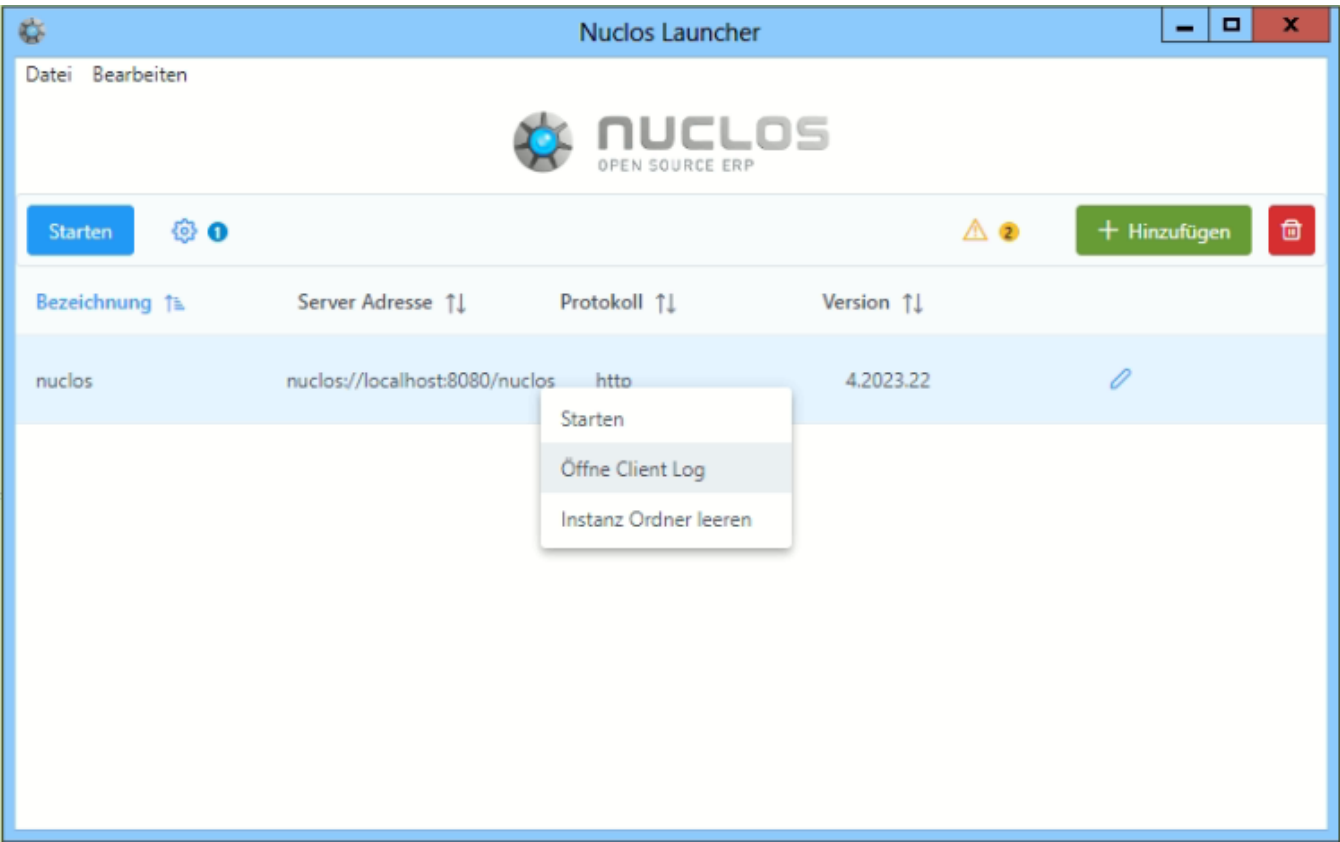

The screenshot shows the 'Nuclos Launcher' application. At the top, there's a title bar and a menu bar with 'Datei' and 'Bearbeiten'. Below the menu bar is a header section with the 'NUCLOS OPEN SOURCE ERP' logo. Underneath the header is a toolbar with buttons: 'Starten', a settings icon, a warning icon with a '2' badge, '+ Hinzufügen', and a trash icon. The main area contains a table with columns: 'Bezeichnung ↑↓', 'Server Adresse ↑↓', 'Protokoll ↑↓', and 'Version ↑↓'. The table has one row with the following data: 'nuclos', 'nuclos://localhost:8080/nuclos', 'http', and '4.2023.22'. A context menu is open over the first row, showing three options: 'Starten', 'Öffne Client Log', and 'Instanz Ordner leeren'.

Bezeichnung ↑↓	Server Adresse ↑↓	Protokoll ↑↓	Version ↑↓
nuclos	nuclos://localhost:8080/nuclos	http	4.2023.22

Open the client log via the Launcher.

Rich Client

The Rich Client writes `nuclos_client.log` to:

Operating system	Path
------------------	------

Windows	C:\Users\<user>\AppData\Local\Temp\
Linux	/tmp
macOS	/tmp

Here you find, among others, the errors occurring in the client.

Related pages

 Login

Start the client.

[Open](#)